## SENSORS OF HOT PLACES






## **BMA**: thermocouple type

Description:

Single and double mineral insulated *thermocouple* with connection head and compression fitting. Temperature: "J" and "L" type 0...750 °C, "K" type 0...1100 °C,

"T" type -190...400 °C, "E" type 0...900 °C, "N" type 0...1250 °C

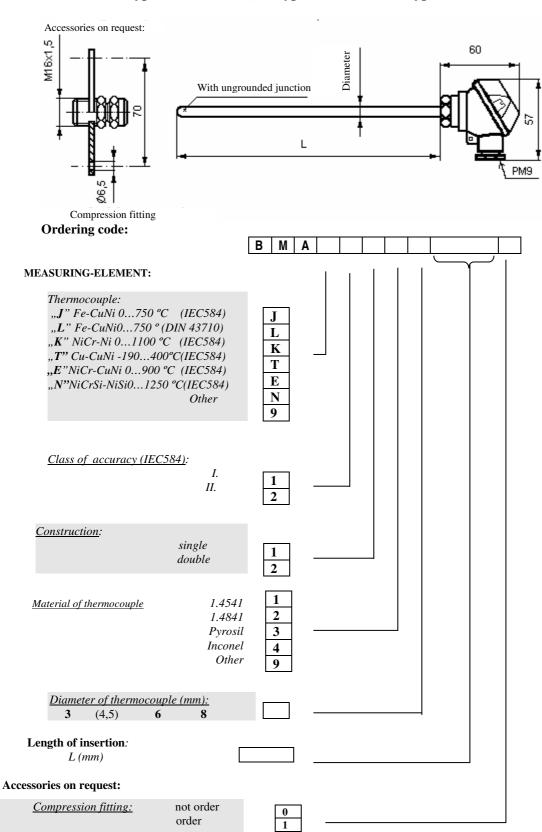

Naturally, we can differ from the above construction.