SENSORS OF HOT PLACES

KMA : thermocouple type

Description:

Single and double mineral insulated thermocouple with connection head and compression fitting.

Temperature: **„J" and „L" type 0…750 °C, „K" type 0…1100 °C ,**
„T" type -190…400 °C, „E" type 0…900 °C, „N" type 0…1250 °C

Accessories on request

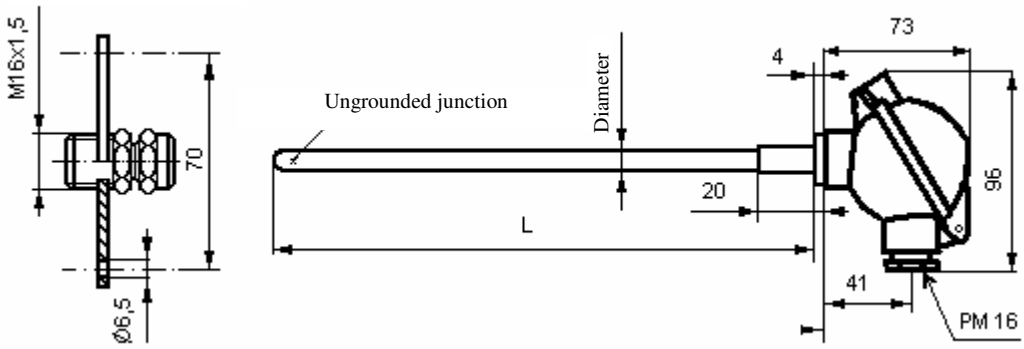

Compression fitting

Ordering code:

K	M	A							

MEASURING-ELEMENT:

Type of mineral insulated thermocouple:

„J" Fe-CuNi 0…750 °C (IEC584)	**J**
„L" Fe-CuNi0…750 ° (DIN 43710)	**L**
„K" NiCr-Ni 0…1100 °C (IEC584)	**K**
„T" Cu-CuNi -190…400°C(IEC584)	**T**
„E"NiCr-CuNi 0…900 °C (IEC584)	**E**
„N"NiCrSi-NiSi0…1250 °C(IEC584)	**N**
Other	**9**

Class of accuracy (IEC584):

I.	**1**
II.	**2**

Construction:

Simple	**1**
Double	**2**

Material of TC:

1.4541	**1**
1.4841	**2**
Pyrosil	**3**
Inconel	**4**
Other	**9**

Diameter of thermocouple (mm):

3	4	(4,5)	**6**	**8**

Insertion length:

L (mm)

ACCESSORIES ON REQUEST:

Compression fitting: Not order	**0**
Order	**1**

Naturally, we can differ from the above construction.

Please, fill in the ordering code and send your enquiry (order) to us.
fax: 00-36-1-282-6135 , e-mail: ugyfelsz@rhodium.hu , We will discuss the details.
If you have question, please call: 00-36-1-282-5689 and 00-36-1-282-8308, Our customer service is available.