MINERAL INSULATED THERMOCOUPLE

MMA : mineral insulated thermocouple

Description:

Handy, mineral insulated thermocouple with heat-radiation protector. End termination: miniature plug, self-locking round connection, or bare ends.

Temperature: **„J" type 0…750 °C, „K" type 0…1100 °C**

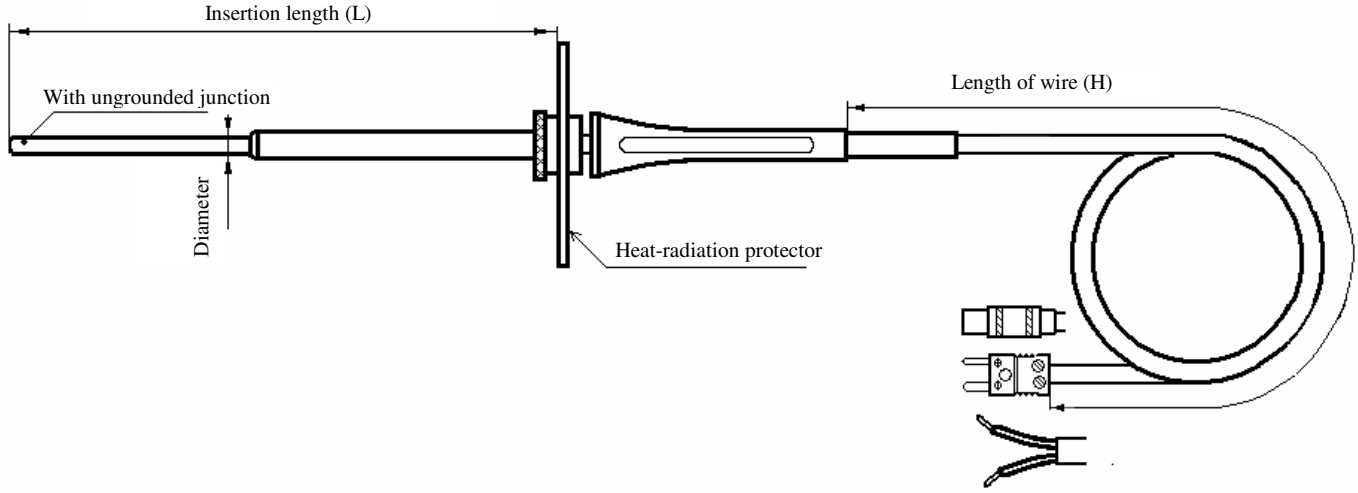

Ordering code:

M	M	A									

Type of mineral insulated thermocouple:
„J"Fe-CuNi 0-750 °C (IEC584) — **J**
„K"NiCr-Ni 0-1100 °C (IEC584) — **K**
Other — **9**

Class of accuracy(IEC584):
I. — **1**
II. — **2**

Construction:
Single — **1**
Double — **2**

Material of thermocouple:
1.4541 — **1**
1.4841 — **2**
Pyrosil — **3**
Inconel — **4**
Other — **9**

Diameter of thermocouple (mm):
1,5 3 6 8

Insertion length: *L[mm]*

WIRE:

Wire exterior material

PVC	Silicon	Teflon	Fiberglass	Other
105°C	*180 °C*	*250 °C*	*400 °C*	
1	**2**	**3**	**4**	**9**

Shield of wire

Non	Exterior	Interior
0	**1**	**2**

Length of wire: *H [mm]*

Naturally, we can differ from the above construction.

Please, fill in the ordering code and send your enquiry (order) to us.

fax: 00-36-1-282-6135 , e-mail: ugyfelsz@rhodium.hu , We will discuss the details.
If you have question, please call: 00-36-1-282-5689 and 00-36-1-282-8308, Our customer service is available.