

# RESISTANCE TYPES




## MED resistance type

### Description:

Handy, robust, resistance temperature sensor (for dense agents.)

Temperature: -200...+600°C, -50...+400°C

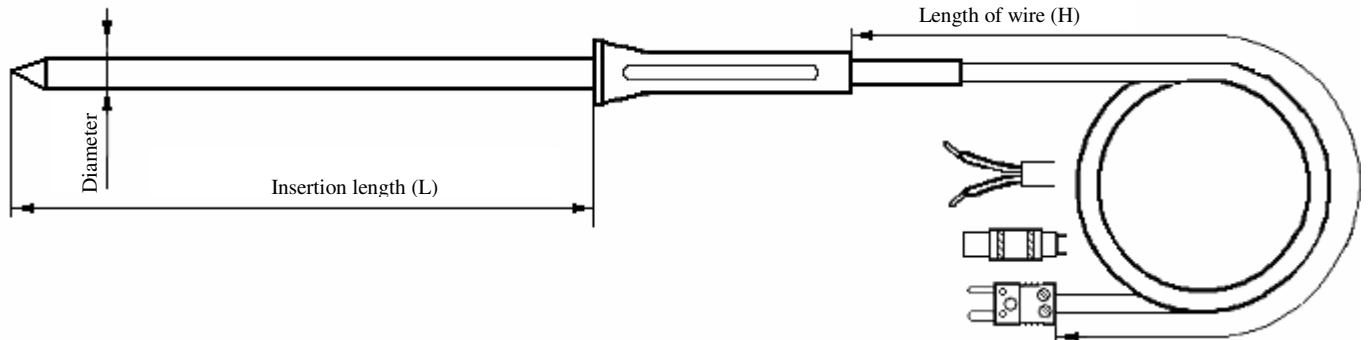

### Ordering code:

#### MEASURING-ELEMENT:

Type of resistance: Pt100  
Other

Class of accuracy: A  
B  
Other

Construction: Simple  
Double  
Triple

Connection: 2 wire  
3 wire  
4 wire

Measuring range: -200...+600° C  
-50...+400° C

#### THERMOWELL, CONNECTION:

Material of thermowell: 1.4301  
1.4541  
Other

Diameter of thermowell [mm]: 4  
6  
Other

Length of thermowell [mm]:

#### WIRE:

Wire exterior material  
PVC Silicon Teflon Fiberglass Other  
105°C 180 °C 250 °C 400 °C  
**1 2 3 4 9**

Shield of wire  
Non Exterior Interior  
**0 1 2**

Length of wire:  
H (mm)

M	E	D																		
			<b>1</b>																	
			<b>9</b>																	
			<b>A</b>																	
			<b>B</b>																	
			<b>9</b>																	
			<b>1</b>																	
			<b>2</b>																	
			<b>3</b>																	
			<b>2</b>																	
			<b>3</b>																	
			<b>4</b>																	
			<b>1</b>																	
			<b>2</b>																	
			<b>1</b>																	
			<b>2</b>																	
			<b>1</b>																	
			<b>2</b>																	
			<b>1</b>																	
			<b>2</b>																	
			<b>4</b>																	
			<b>6</b>																	
			<b>9</b>																	
			<input type="text"/>																	
			<input type="checkbox"/>																	
			<input type="checkbox"/>																	
			<input type="text"/>																	

Naturally, we can differ from the above construction.

Please, fill in the ordering code and send your enquiry (order) to us.

fax: 00-36-1-282-6135 , e-mail: [ugyfelsz@rhodium.hu](mailto:ugyfelsz@rhodium.hu) , We will discuss the details.

If you have question, please call: 00-36-1-282-5689 and 00-36-1-282-8308, Our customer service is available