

FLANGED TEMPERATURE SENSORS




VNJ H: thermocouple type

Description:

Thermocouple sensor, **DN25/PN25** flanged mounting with neck (length of neck=**310 mm**) with connection head (**DIN B**), for temperature measuring of fluent and gaseous agents.

Temperature: „J” 0...750°C, „K” 0...1100°C, „S” 0...1300°C, „R” 0...1400°C, „B” 0...1800°C

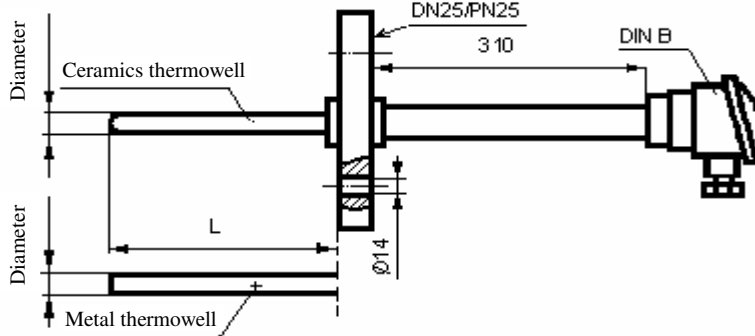

Ordering code:

MEASURING ELEMENT:

<i>Thermocouple type:</i> (Fe-CuNi)	J
(NiCr-Ni)	K
(PtRh90/10-Pt)	S
(PtRh87/13-Pt)	R
(PtRh70/30-PTRh94/6)	B
Other	9

<i>Class of accuracy:</i>	(J, K, S, R) I.
	(B) II.

Diameter of thermocouple (mm):

(J, K)	3,0
(J, K)	1,0
(S, B)	0,5
(S, R)	0,35
Other	9

<i>Construction:</i>	simple
	double

THERMOWELL:

<i>Material of thermowell</i>	1.4301
	1.4541
	1.4571
	C530
	C610
	C799
	Other

Diameter of thermowell [mm]:

	13,5
	15,0
	16,0
	18,0
	20,0
	22,0
(C610,C799)	24,0
(C530)	26,0
Other	

Length of thermocouple: L [mm]:

V N J H

J									
K									
S									
R									
B									
9									
1									
2									
3									
1									
0, 5									
0, 3	5								
9									
1									
2									
1									
2									
3									
4									
5									
6									
9									
1	3	5							
1	5								
1	6								
1	8								
2	0								
2	2								
2	4								
2	6								
9									

Naturally, we can differ from the above construction.

Please, fill in the ordering code and send your enquiry (order) to us.

fax: 00-36-1-282-6135 , e-mail: ugyfelsz@rhodium.hu , We will discuss the details.

If you have question, please call: 00-36-1-282-5689 and 00-36-1-282-8308, Our customer service is available.